



HydroTech Environmental
ENGINEERING AND GEOLOGY, DPC

Main Office
77 Arkay Drive, Suite K
Hauppauge, New York 11788
T (631) 462-5866 ; F (631) 462-5877

WWW.HYDROTECHENVIRONMENTAL.COM

January 19, 2021

New York City Office of Environmental Remediation
City Voluntary Cleanup Program
c/o Shaminder Chawla
100 Gold Street, 2nd Floor
New York, NY 10038

Re: VCP # 21CVCP028X
E-Designation # 20EHAZ280X
873 East 228th Street
Remedial Action Work Plan (RAWP) Stipulation List

Dear Mr. Chawla:

HydroTech Environmental Engineering and Geology, DPC hereby submits a Remedial Action Plan (RAWP) Stipulation List for the Site to the New York City Office of Environmental Remediation (OER) on behalf of 873 East 228th St, LLC. This letter serves as an addendum to the RAWP to stipulate additional content, requirements, and procedures that will be followed during the site remediation. The contents of this list are added to the RAWP and will supersede the content in the RAWP where there is a conflict in purpose or intent. The additional requirements/procedures include the following Stipulation List below:

1. The criterion attached in **Appendix 1** will be utilized if additional petroleum containing tank or vessel is identified during the remedial action or subsequent redevelopment excavation activities. All petroleum spills will be reported to the NYSDEC hotline as required by applicable laws and regulations. This contingency plan is designed for heating oil tanks and other small or moderately sized storage vessels. If larger tanks, such as gasoline storage tanks are identified, OER will be notified before this criterion is utilized.
2. A pre-construction meeting is required prior to start of remedial excavation work at the site. A pre-construction meeting will be held at the site and will be attended by OER, the developer or developer representative, the consultant, excavation/general contractor, and if applicable, the soil broker.
3. A Historic Fill Transfer and Disposal Notification Form to each disposal facility and a pre-approval letter from all disposal facilities will be provided to OER prior to any soil/fill material removal from the site. The Historic Fill Transfer and Disposal Notification Form template is attached in **Appendix 2**. Documentation specified in the RAWP - Appendix 3 - Section 1.6 "Materials Disposal Off-Site" will be provided to



OER. If a different disposal facility for the soil/fill material is selected, OER will be notified immediately.

4. Signage for the project will include a sturdy placard mounted in a publically accessible right of way to building and other permits signage will consist of the NYC VCP Information Sheet (attached **Appendix 3**) announcing the remedial action. The Information sheet will be laminated and permanently affixed to the placard.
5. If the site contains hazardous waste that will be excavated and disposed of offsite, OER will work with the development team to seek an exemption for the property from the state Hazardous Waste Program Fee (\$130/ton) and Special Assessment on Hazardous Waste (up to \$27/ton). To qualify for an exemption, the site must be enrolled in the city Voluntary Cleanup Program; hazardous waste must result from remedial action set forth in a cleanup plan approved by OER; and OER must oversee the cleanup. It is the applicant's responsibility to notify the OER Project Manager, copying the supervising Project Manager and OER Deputy Director Shaminder Chawla, before hazardous waste is shipped from the site. Unless the Department of Environmental Conservation is notified before waste is shipped from the site, the project may not receive an exemption from the fee. This exemption does not cover, and the project remains responsible for, a Hazardous Waste Annual Report to be filed with DEC and Quarterly Returns for Special Assessments on Hazardous Waste to be filed with the state Department of Taxation and Finance. **Appendix 4** includes additional information about the exemption from the Hazardous Waste Program Fee and the Special Assessment on Hazardous Waste.
6. Collection and analysis of four end-point samples from the bottom of the excavation to evaluate the performance of the remedy with respect to attainment of Track 4 SCO's. A map indicating end-point sampling locations is attached in **Appendix 5**. Samples will be analyzed for contaminants of concern Metals.
7. OER requires parties seeking City Brownfield Incentive Grants to carry insurance. For a cleanup grant, both the excavator and the trucking firm(s) that handle removal of soil must carry or be covered under a commercial general liability (CGL) policy that provides \$1 million per claim in coverage. OER recommends that excavators and truckers also carry contractors pollution liability (CPL) coverage, also providing \$1 million per claim in coverage. The CGL policy, and the CPL policy if obtained, must be in force during the period when the party excavates and disposes of soil. For an investigation grant, an environmental consultant must be a qualified vendor in the BIG program and carry \$1 million of professional liability (PL) coverage. A fact sheet regarding insurance is attached as **Appendix 6**.
8. Monthly reports are required on the project's status and schedule to the OER project manager after RAWP/RAP is approved/NTP issued until Remedial Action Report/Remedial Closure Report is received. This is your (Environmental Consultant's) responsibility to provide this report. If you (environmental consultant) are no longer retained for continuation of project, you are required to notify OER about this. After



excavation work is completed, monthly reports are still required and will be provided by the consultant or owner/developer for the duration of the construction period. Monthly report template is attached in **Appendix 8**.

9. Daily reports will be provided during active excavation work. If no work is performed for extended time period, daily report frequency will be reduced to weekly basis. Daily report template is attached in **Appendix 7**.
10. Trucking log sheets will be utilized as trucks are transported from sites, and completed logs should be attached to the Remedial Action Report (RAR) as an appendix. The goal of this log is to clearly document the destination of material leaving the site, the parties responsible for its transfer, and other pertinent details. The trucking log template is provided in **Appendix 9**.
11. Truck routing to the project site shall only occur according with the approved RAWP. The applicant, applicant's consultant and contractors are responsible for maintaining proper traffic in the vicinity of the site during all field operations, truck loading/unloading, etc.
12. Dewatering will be performed in full compliance with applicable laws, rules and regulations. Dewatering permit will be obtained from NYCDEP prior to construction activities.
13. The stamped/signed RAWP certification page is included in **Appendix 10**.
14. Stabilized construction entrance and decontamination area will be constructed. All vehicle will be cleaned on-site to avoid any tracked materials (e.g., soils) spilling on roadways. Also, erosion controls must be installed, if necessary.
15. Applicant, Applicant's consultant and contractors are responsible for obtaining all permits necessary for the performance of the work, as well as, paying all associated fees (e.g., demolition, temporary water connection, dewatering, temporary electric connection, etc.).
16. Applicants and Applicant's consultant shall be solely responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the work. Copy of the Health and Safety Plan (HASP) must be provided to the subcontractor (s). Copy of the HASP should be available at the site at all times.

Sincerely,

Tarek Z. Khouri

Cc: A. Alfieri, NYCOER

Appendix 1
Generic Procedures for Management of Underground Storage Tanks
Identified under the NYC VCP

Prior to Tank removal, the following procedures should be followed:

- Remove all fluid to its lowest draw-off point.
- Drain and flush piping into the tank.
- Vacuum out the “tank bottom” consisting of water product and sludge.
- Dig down to the top of the tank and expose the upper half.
- Remove the fill tube and disconnect the fill, gauge, product, vent lines and pumps. Cap and plug open ends of lines.
- Temporarily plug all tank openings, complete the excavation, remove the tank and place it in a secure location.
- Render the tank safe and check the tank atmosphere to ensure that petroleum vapors have been satisfactorily purged from the tank.
- Clean tank or remove to storage yard for cleaning.
- If the tank is to be moved, it must be transported by licensed waste transporter. Plug and cap all holes prior to transport leaving a 1/8 inch vent hole located at the top of the tank during transport.
- After cleaning, the tank must be made acceptable for disposal at a scrap yard, cleaning the tanks interior with a high pressure rinse and cutting the tank in several pieces.

During the tank and pipe line removal, the following field observations should be made and recorded:

- A description and photographic documentation of the tank and pipe line condition (pitting, holes, staining, leak points, evidence of repairs, etc.).
- Examination of the excavation floor and sidewalls for physical evidence of contamination (odor, staining, sheen, etc.).
- Periodic field screening (through bucket return) of the floor and sidewalls of the excavation, with a calibrated photoionization detector (PID).

Impacted Soil Excavation Methods

The excavation of the impacted soil will be performed following the removal of the existing tanks. Soil excavation will be performed in accordance with the procedures described under Section 5.5 of Draft DER-10 as follows:

- A description and photographic documentation of the excavation.
- Examination of the excavation floor and sidewalls for physical evidence of contamination (odor, staining, sheen, etc.).
- Periodic field screening (through bucket return) of the floor and sidewalls of the excavation, with calibrated photoionization detector (PID).

Final excavation depth, length, and width will be determined in the field, and will depend on the horizontal and vertical extent of contaminated soils as identified through physical examination (PID response, odor, staining, etc.). Collection of verification samples will be performed to evaluate the success of the removal action as specified in this document.

The following procedure will be used for the excavation of impacted soil (as necessary and appropriate):

- Wear appropriate health and safety equipment as outlined in the Health and Safety Plan.

- Prior to excavation, ensure that the area is clear of utility lines or other obstructions. Lay plastic sheeting on the ground next to the area to be excavated.
- Using a rubber-tired backhoe or track mounted excavator, remove overburden soils and stockpile, or dispose of, separate from the impacted soil.
- If additional UST's are discovered, the NYSDEC will be notified and the best course of action to remove the structure should be determined in the field. This may involve the continued trenching around the perimeter to minimize its disturbance.
- If physically contaminated soil is present (e.g., staining, odors, sheen, PID response, etc.) an attempt will be made to remove it, to the extent not limited by the site boundaries or the bedrock surface. If possible, physically impacted soil will be removed using the backhoe or excavator, segregated from clean soils and overburden, and staged on separated dedicated plastic sheeting or live loaded into trucks from the disposal facility. Removal of the impacted soils will continue until visibly clean material is encountered and monitoring instruments indicate that no contaminants are present.
- Excavated soils which are temporarily stockpiled on-site will be covered with tarp material while disposal options are determined. Tarp will be checked on a daily basis and replaced, repaired or adjusted as needed to provide full coverage. The sheeting will be shaped and secured in such a manner as to drain runoff and direct it toward the interior of the property.

Once the site representative and regulatory personnel are satisfied with the removal effort, verification of confirmatory samples will be collected from the excavation in accordance with DER-10.

Appendix 2
Historic Fill Transfer and Disposal Notification Form

Historic Fill & Soil Disposal Notification Form
New York City Office of Environmental Remediation

Date: January 19, 2021

To operators and representatives of disposal facilities and government regulators:

The New York City Office of Environmental Remediation (OER) operates several environmental remediation regulatory programs in New York City that manage light to moderately contaminated properties that are planned for redevelopment. These projects commonly involve the removal of historical fill and soil from properties for development and other purposes. As with any environmental regulatory program, lawful transport and disposal of historic fill and soil is mandatory. It is also our highest priority.

Disposal facilities, recycling facilities and clean fill facilities (collectively, “receiving facilities”) for historic fill and soil may be located in New York or neighboring states. Our research has indicated that a wide range of facility types and a complex set of regulatory requirements and obligations for a receiving facility operation exist within each jurisdiction. Receiving facilities are required to comply with applicable laws and regulations and may operate under state and local authority via permits, licenses, registrations, agreements and other legal instruments that dictate requirements for the material they can receive. Operating requirements may include adherence to applicable chemical standards, guidance levels, criteria, policy or other bases to determine the suitability for receipt of historical fill or soil at a receiving facility. Such requirements may also specify sample frequency, location, sampling method, chemical analytes, or analytical methods. Receiving facility soil/fill sampling requirements often differ from standard remedial investigation protocol performed in the original environmental study of the property.

Given the variability of data requirements for receiving facilities, the wide range of receiving facility types, and the complexity of regulatory requirements and obligations, OER is seeking to assist government regulators and facility operators and their technical representatives to achieve compliance with regulatory requirements for disposal of historic fill and soil at receiving facilities for projects we administer. Further, we seek to ensure that all of the data and information that is developed in OER’s regulatory programs (for instance, site environmental history and soil chemistry) is available to government regulators and to facility managers when making decisions on suitability for disposal to a receiving facility.

This document provides formal notification from OER of the availability of environmental information regarding the physical and chemical content of historical fill and soil that is proposed for transfer to a disposal, recycling or clean fill facility from a property located at:

873 East 228th Street, Bronx, NY
OER Site 20TMP1422X/21CVCP028X

The above referenced property has undergone regulated environmental investigation and is the subject of remedial action work plan under the authority of OER. All environmental data and information generated during this regulatory process is available online in OER’s Document Repository listed below. Be advised that many properties are also regulated under state environmental law, and additional data may be available from state agencies. OER reserves the right to share this information with applicable state regulators.

<https://a002-epic.nyc.gov/app/workspace/17700/docrepository>

According to New York State DER-10 Technical Guidance for Site Investigation and Remediation, historical fill is non-indigenous fill material deposited on a property to raise its topographic elevation. The origin of historical fill is unknown but it is commonly known to contain ash from wood and coal combustion, slag, clinker, construction debris, dredge spoils, incinerator residue, and demolition debris. Historic fill is a regulated solid waste in the State of New York. Prior to making a determination regarding the suitability of historic fill and/or soil from this property for disposal at this receiving facility, **we strongly recommend that you review all of the data and information available for this property in our Document Repository** listed above. The repository includes:

- A Phase 1 history of use of the property;
- A Remedial Investigation Report for the property which includes:
 - Boring logs that describe physical observations of the historical fill material made by a trained environmental professional;
 - Chemical data for grab samples of historical fill collected during the remedial investigation;
- A Remedial Action Work Plan for the property.

If you have any questions, please contact Horace Zhang at (212) 788-8484 or H Zhang@dep.nyc.gov for more information.

Appendix 3

NYC VCP Signage



NYC Voluntary Cleanup Program

873 East 228th Street
Site #: 21CVCP028X

This property is enrolled in the New York City Voluntary Cleanup Program for environmental remediation. This is a voluntary program administered by the NYC Office of Environmental Remediation.

For more information,
log on to: www.nyc.gov/oer

Or scan with smart phone:



If you have questions or would like more information,
please contact:

Shaminder Chawla at (212) 442-3007
or email us at brownfields@cityhall.nyc.gov

Appendix 4

Hazardous Waste Exemptions Fact Sheet



Exemptions from the state Hazardous Waste Program Fee & Special Assessment

If your site is enrolled in the city Voluntary Cleanup Program (VCP) and contains hazardous waste that will be excavated and disposed of offsite, OER can work with your development team to exempt your property from the \$130/ton state Hazardous Waste Program Fee and the Special Assessment on Hazardous Waste.

Exemption from the Hazardous Waste Program Fee

To qualify for an exemption from the Hazardous Waste Program Fee:

1. A site must be enrolled in the city Voluntary Cleanup Program;
2. Hazardous waste must result from remedial action set forth in a cleanup plan approved by OER; and
3. OER must oversee the cleanup.

Process for obtaining a Hazardous Waste Program Fee exemption:

For each VCP site, OER will submit three certifications to the New York State Department of Environmental Conservation (DEC):

1. OER will prepare a Notice of Potential Generation of Hazardous Waste after a soil test shows a site contains hazardous waste. To prepare this Notice, you must provide your OER project manager with:

- the site's EPA generator ID number;
- the date of the soil test confirming hazardous waste;
- the quantity of hazardous waste, in tons, anticipated to be shipped; and
- the anticipated dates for the start and completion of remediation.

For further information, please contact:

Michelle Sarro
Assistant General Counsel
(212) 341-2015
MSarro@dep.nyc.gov

DEC must receive this form **before** hazardous waste is shipped from your site. Otherwise, your claim for an exemption may be denied.

2. After hazardous waste has been removed from the site, you must notify your OER project manager that removal is complete. OER will then distribute a Certification of Hazardous Waste Generation to your project team which, when filled out, documents how the hazardous waste was managed. Once completed, it must be signed by the generator (or site owner) and the site's Qualified Environmental Professional and returned to your OER project manager with a copy to Michelle Sarro, msarro@dep.nyc.gov.

Upon receipt of the Certification of Hazardous Waste Generation, OER will issue a **\$10/ton fee** for services to obtain the exemption from the state Hazardous Waste Program Fee.

3. OER will then issue a Certification of Remedial Action that Generated Hazardous Waste to DEC representing OER's approval of how a site managed its hazardous waste.

DEC will make its determination after receiving the last two certifications. OER will then notify the project of the exemption.

Exemption from the Special Assessment on Hazardous Waste

VCP sites are also eligible for an exemption from the Special Assessment on Hazardous Waste, which can cost projects up to \$27/ton.

It is advised that you assert your interest in obtaining the Special Assessment exemption when you file a TP-550 Quarterly Return for Special Assessments on Hazardous Waste Generated in New York State form with the state Department of Taxation and Finance within 20 days of the end of the calendar quarter in which the waste was generated. In line item 3 on the form, indicate the number of tons of hazardous waste that were generated in New York State under an order of, or agreement or contract with, DEC. For access to the TP-550 form and further instructions see <http://www.tax.ny.gov/bus/haz/hzrdwste.htm>.

Ongoing Obligations

Regardless of the exemptions from the Hazardous Waste Program Fee and Special Assessment on Hazardous Waste, parties must:

- File a Hazardous Waste Annual Report with DEC by March 1 of each year if your site generated 15 tons or more of hazardous waste in the prior calendar year. For details, see <http://www.dec.ny.gov/chemical/8770.html>. To set forth the basis for an exemption from the Hazardous Waste Program Fee, put an X in the Exempt Remedial box in Box H of Section 1 of the Waste Generation and Management (GM) form and in the Comments Box (at the bottom of the form) include "New York City Voluntary Cleanup Program, VCP Site Number _____"; and
- File a TP-550 Quarterly Return for Special Assessments on Hazardous Waste Generated in New York State form with the state Department of Taxation and Finance within 20 days of the end of the calendar quarter in which the waste was generated. For access to the TP-550 form and further instructions see <http://www.tax.ny.gov/bus/haz/hzrdwste.htm>.

Appendix 5

End-Point Sampling Map



© HYDROTECH ENVIRONMENTAL
ENGINEERING AND GEOLOGY, DPC

ALL RIGHTS RESERVED. THE PRESENTED DRAWINGS,
DESIGNS, AND IDEAS EMBODIED THEREIN ARE THE
PROPERTY OF HYDROTECH ENVIRONMENTAL
ENGINEERING AND GEOLOGY, DPC AND SHALL
NOT BE COPIED, REPRODUCED, DISCLOSED TO
OTHERS, OR USED IN CONNECTION WITH ANY
WORK OTHER THAN THE SPECIFIED PROJECT FOR
WHICH THEY HAVE BEEN PREPARED, IN WHOLE OR
IN PART, WITHOUT THE PRIOR WRITTEN
AUTHORIZATION OF HYDROTECH ENVIRONMENTAL
ENGINEERING AND GEOLOGY, DPC.

DATE	DESCRIPTION	CHK

SEAL & SIGNATURE



HYDROTECH ENVIRONMENTAL
ENGINEERING AND GEOLOGY,
DPC

77 ARKAY DRIVE, SUITE K
HAUPPAUGE, NY 11788

TEL: (631) 462-5866
FAX: (631) 462-5877

BASE DRAWING PREPARED BY


PROJECT NAME AND ADDRESS

873 EAST 228TH STREET
BRONX, NY 10466

PROJECT FIGURE

FIGURE 6: ENDPOINT SAMPLING PLAN

PROJECT NO. 200036	DATE 12/17/20
DRAWN BY G.T.	REVIEWED BY R.X.
SCALE (11X17) NOT TO SCALE	APPROVED BY T.K.



DETAIL FOR SP-3 HOTSPOT SAMPLING



SUBJECT PROPERTY
873 EAST 228TH STREET
4-STORY RESIDENTIAL BUILDING

ADJACENT 3-STORY
RESIDENTIAL BUILDING

SP-3 HOTSPOT
(5' X 5')

ADJACENT 1-STORY
INSTITUTION

CONCRETE PAVED
GROUND LEVEL PARKING

BASEMENT
OUTLINE
ADJACENT 2-STORY
RESIDENTIAL BUILDING

ADJACENT 2-STORY
INSTITUTION

ADJACENT 2-STORY
RESIDENTIAL BUILDING

EAST 228TH
STREET

BRONXWOOD
AVENUE

ADJACENT 1-STORY
INSTITUTION

LEGEND

- PROPERTY OUTLINE
- BASEMENT OUTLINE
- ADJACENT PROPERTY
- EXCAVATION TO 10'-11' BELOW SIDEWALK GRADE FOR BASEMENT CONSTRUCTION
- AREA WITH SUPERFICIAL DEMOLITION DEBRIS REMOVAL
- EXCAVATION TO 7' BELOW SIDEWALK GRADE FOR SP-3 HOTSPOT REMOVAL
- HOTSPOT ENDPOINT SAMPLE FOR METALS (HS-EP)
- ENDPOINT SAMPLE FOR FULL E PARAMETERS (EP-)

Appendix 6

BIG Program Insurance Fact Sheet



FACT SHEET – BIG PROGRAM INSURANCE REQUIREMENTS

Investigation Grants – for a developer or site owner to be eligible for a BIG investigation grant, its environmental consultant(s) must be:

- a Qualified Vendor in the BIG Program; and
- maintain Professional Liability (PL) insurance of \$1M per claim and annual aggregate.

Cleanup Grants – for a developer or site owner to be eligible for a BIG cleanup grant:


- Its general contractor or excavation/foundation contractor hired to perform remedial work must maintain Commercial General Liability (CGL) insurance of at least \$1M per occurrence and \$2M in the general aggregate. It is recommended that the general contractor or excavation/foundation contractor also maintain a Contractors Pollution Liability policy (CPL) of at least \$1M per occurrence.
- Its subcontractors who are hired by the general contractor etc. to perform remedial work at a site, including soil brokers and truckers, must also maintain a CGL policy in the amount and with the terms set forth above. It is recommended that subcontractors also maintain a CPL policy in the amount and with the terms set forth above.
- The CGL policy must cover the period when the project seeking a BIG grant performed remedial work, including excavation and disposal of soil.
- Its environmental consultant(s) hired to oversee the cleanup must be:
 - a. a BIG Qualified Vendor; and
 - b. maintain Professional Liability (PL) insurance of \$1M per claim and annual aggregate.

If, in the alternative, the developer hires its environmental consultant to perform the cleanup, the environmental consultant must maintain CGL insurance in the amount and with the terms set forth above. It is recommended that the environmental consultant also maintain CPL coverage in the amount and with the terms set forth in the first two bulleted items listed above.

A schematic presenting the contractual relationships described above appears on page 2.

Example of Contractual Relationships for Cleanup Work

The Office of Environmental Remediation's Voluntary Cleanup Plan program requires applicants to identify the parties who are engaged in active remediation of their sites including: the General Contractor hired to remediate and/or the excavation contractor hired to excavate soil from the site and the trucking firm(s) that remove soil from the site for disposal at approved facilities.

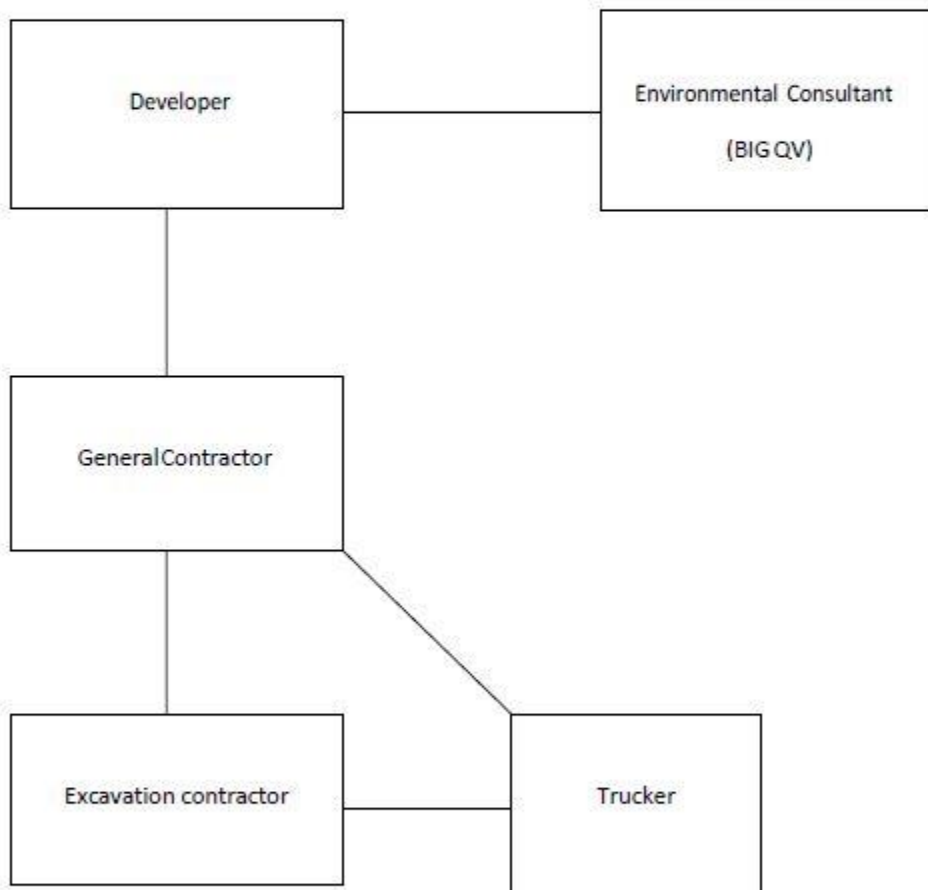

The chart above shows contractual relationships that typically exist for projects that are enrolled in the Voluntary Cleanup Program.

Appendix 7
Daily Report Template



Generic Template for Daily Status Report

Instructions

The Daily Status Report submitted to OER should adhere to the following conventions:

- Remove this cover sheet prior to editing.
- Remove all the **red text** and replace with site-specific information.
- Submit the final version as a Word or PDF file.

Daily Status Reports

Daily status reports providing a general summary of activities for each day of *active remedial work* will be emailed to the OER Project Manager by the end of the following day. Those reports will include:

- Project number and statement of the activities and an update of progress made and locations of work performed;
- Quantities of material imported and exported from the Site;
- Status of on-Site soil/fill stockpiles;
- A summary of all citizen complaints, with relevant details (basis of complaint; actions taken; etc.);
- A summary of CAMP excursions, if any;
- Photograph of notable Site conditions and activities.

The frequency of the reporting period may be revised in consultation with OER project manager based on planned project tasks. Daily email reports are not intended to be the primary mode of communication for notification to OER of emergencies (accidents, spills), requests for changes to the RAWP or other sensitive or time critical information. However, such information will be included in the daily reports. Emergency conditions and changes to the RAWP will be communicated directly to the OER project manager by personal communication. Daily reports will be included as an Appendix in the Remedial Action Report.

DAILY STATUS REPORT

Prepared By: Enter Your Name Here

WEATHER	Snow		Rain		Overcast		Partly Cloudy	X	Bright Sun	
TEMP.	< 32		32-50		50-70	X	70-85		>85	

VCP Project No.:	16CVCP000M	E-Number Project No.:	16EHAN000M	Date:	01/01/2016
Project Name:	Name or Address				

Consultant: Person(s) Name and Company Name	Safety Officer: Person(s) Name and Company Name
General Contractor: Person(s) Name and Company Name	Site Manager/ Supervisor: Person(s) Name and Company Name
Work Activities Performed (Since Last Report): Provide details about the work activities performed.	
Working In Grid #: A1, B1, C1	
Samples Collected (Since Last Report): No samples collected or provide details	
Air Monitoring (Since Last Report): No air monitoring performed or provide details Prestart Conditions – PID = 0.0 ppm, Dust = 0.000 High Conditions – PID = 0.0 ppm, Dust = 0.000	
Problems Encountered: No problems encountered or provide details	
Planned Activities for the Next Day/ Week: Provide details about the work activities planned for the next day/ week.	

Example:

Facility # Name/ Location Type of Waste Solid <u>Or</u> Liquid	Facility # Name Location Type of Waste Solid <u>Or</u> Liquid	Facility # Name Location Type of Waste Solid <u>Or</u> Liquid	Facility # Name Location Type of Waste Solid <u>Or</u> Liquid	Facility # Name Location Type of Waste Solid <u>Or</u> Liquid	##### ABC Facility New York, NY petroleum soils Solid
(Trucks, Cu.Yds. <u>Or</u> Gallons)	Trucks Cu. Yds. <u>Or</u> Gallons	Trucks Cu. Yds. <u>Or</u> Gallons	Trucks Cu. Yds. <u>Or</u> Gallons	Trucks Cu. Yds. <u>Or</u> Gallons	Trucks Cu. Yds.
Today					5120
Total					25600

NYC Clean Soil Bank		Receiving Facility: Name/ Address (Approved by OER)	
Tracking No.:	16CCSB000		
Today	Trucks 5	Cu. Yds. 25	Total Trucks 120 Cu. Yds. 600

Site Grid Map

Insert the site grid map here

Photo Log

Photo 1 – provide a caption	Insert Photo Here – Photo of the entire site
Photo 2 – provide a caption	Insert Photo Here – Photo of the work activities performed
Photo 3 – provide a caption	Insert Photo Here – Photo of the work activities performed

Appendix 8
Weekly / Monthly Report Template

WEEKLY / MONTHLY STATUS REPORT

Prepared By: Enter Your Name Here

VCP Project No.:	16CVCP000M	E-Number Project No.:	16EHAN000M	Date:	01/01/2016
------------------	------------	-----------------------	------------	-------	------------

Project Name:	Name or Address
<p>Project Updates (Since Last Report): Provide details about the work activities performed.</p>	
<p>Problems Encountered: No problems encountered or provide details</p>	
<p>Planned Activities for the Next three months: Provide details about the future work activities.</p>	

Photo Log

Photo 1 – provide a caption	Insert Photo Here – Photo of the entire site
Photo 2 – provide a caption	Insert Photo Here – Photo of the work activities performed
Photo 3 – provide a caption	Insert Photo Here – Photo of the work activities performed

Appendix 9
Soil Disposal and Trucking Log Sheet

Soil Disposal and Trucking Log Sheet

[illegible]

Appendix 10
RAWP Certification Page



CERTIFICATION

I, Tarek Z. Khouri, am currently a registered professional engineer licensed by the State of New York. I performed professional engineering services and had primary direct responsibility for designing the remedial program for the 873 East 228th, Bronx, NY site, site number 21CVCP028X. I certify to the following:


- I have reviewed this document and the Stipulation List, to which my signature and seal are affixed.
- Engineering Controls developed for this remedial action were designed by me or a person under my direct supervision and designed to achieve the goals established in this Remedial Action Work Plan for this site.
- The Engineering Controls to be constructed during this remedial action are accurately reflected in the text and drawings of the Remedial Action Work Plan and are of sufficient detail to enable proper construction.
- This Remedial Action Work Plan (RAWP) has a plan for handling, transport and disposal of soil, fill, fluids and other materials removed from the property in accordance with applicable City, State and Federal laws and regulations. Importation of all soil, fill and other material from off-Site will be in accordance with all applicable City, State and Federal laws and requirements. This RAWP has provisions to control nuisances during the remediation and all invasive work, including dust and odor suppression.

Name: Tarek Z. Khouri

PE License Number: 086611

Signature

Date 2021-01-19



I, Mark E. Robbins, am a Qualified Environmental Professional. I will have primary direct responsibility for implementation of the remedial program for the 873 East 228th Street site, site number 21CVCP028X. I certify to the following:

- This Remedial Action Work Plan (RAWP) has a plan for handling, transport and disposal of soil, fill, fluids and other materials removed from the property in accordance with applicable City, State and Federal laws and regulations. Importation of all soil, fill and other material from off-Site will be in accordance with all applicable City, State and Federal laws and requirements. This RAWP has provisions to control nuisances during the remediation and all invasive work, including dust and odor suppression.

QEP Name: Mark E. Robbins

QEP Signature

Date 2021-01-19